


Fig. 1a

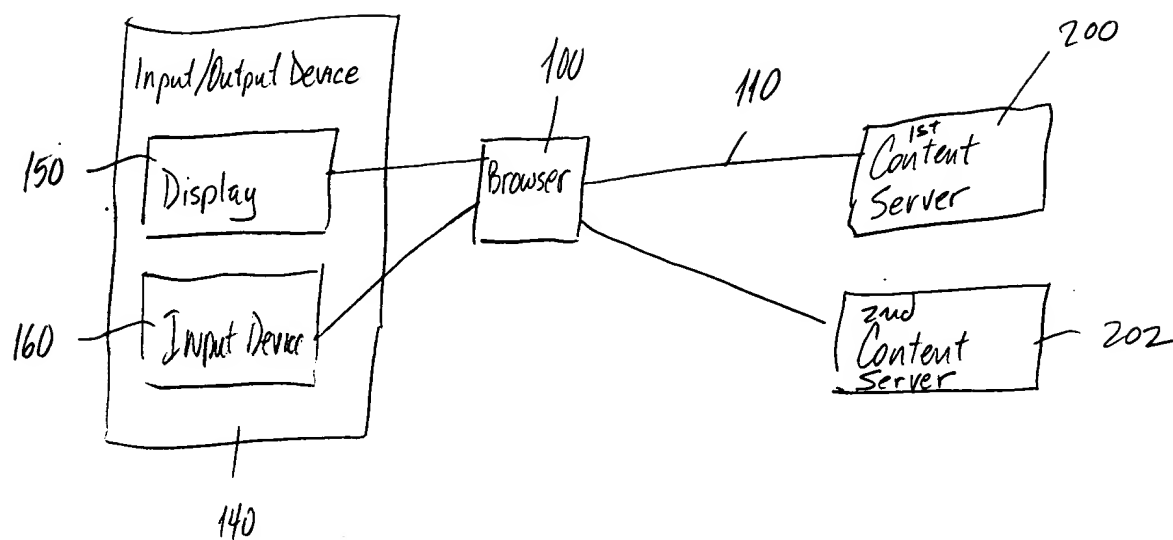

5643376360

Fig. 1b

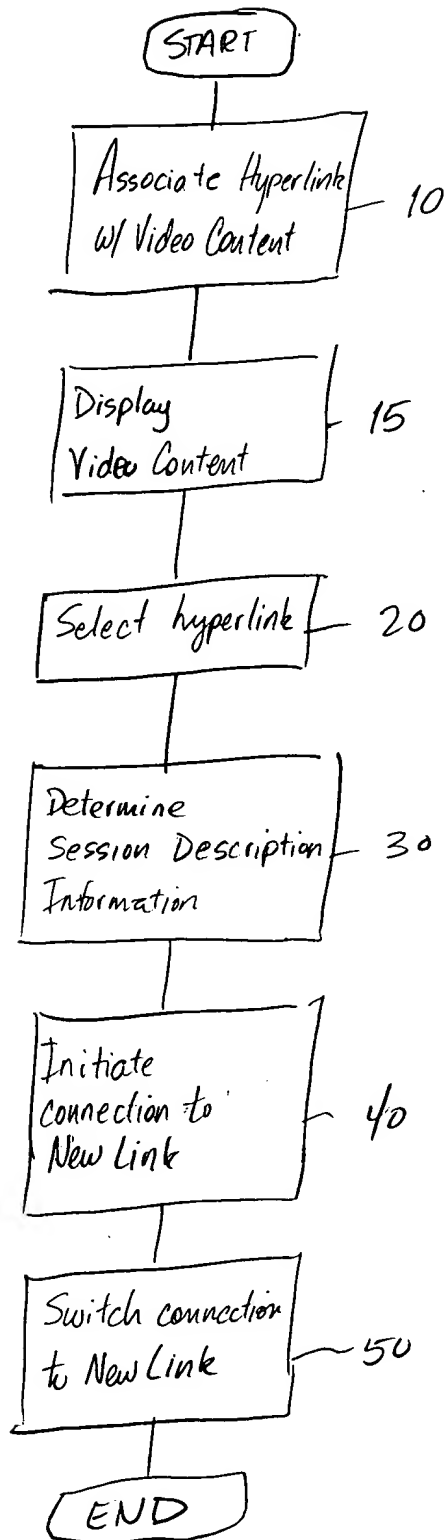


Fig. 1c

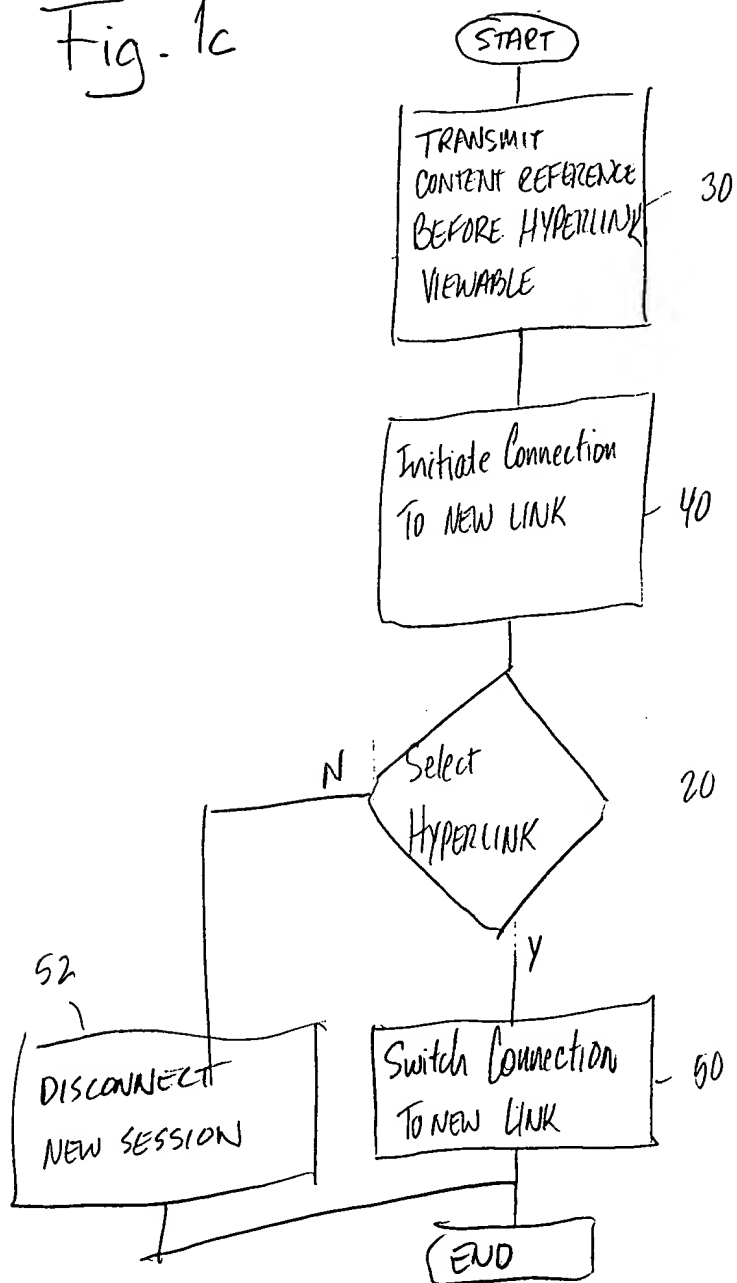


Fig. 1d

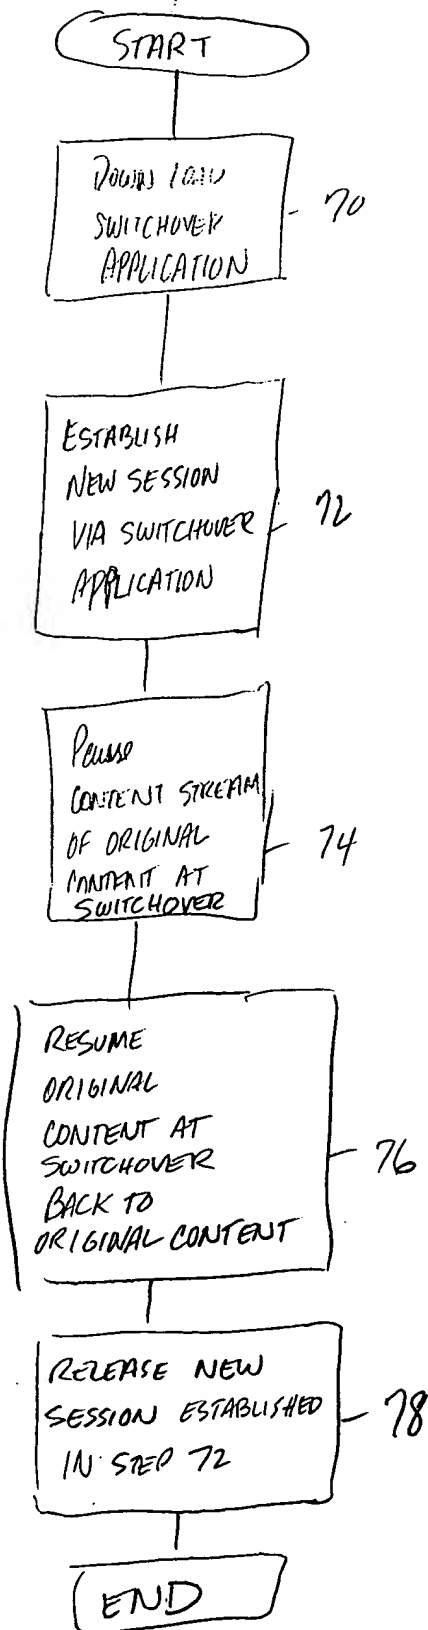


Fig. 2a

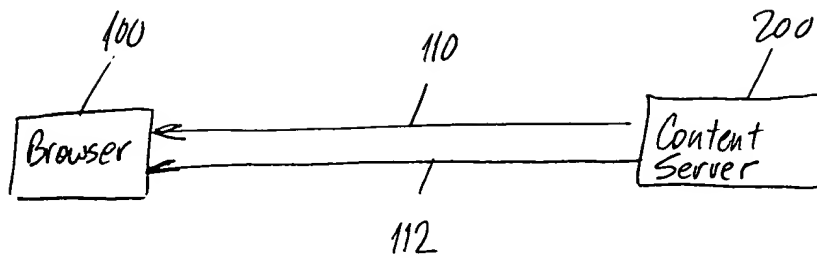


Fig. 2b

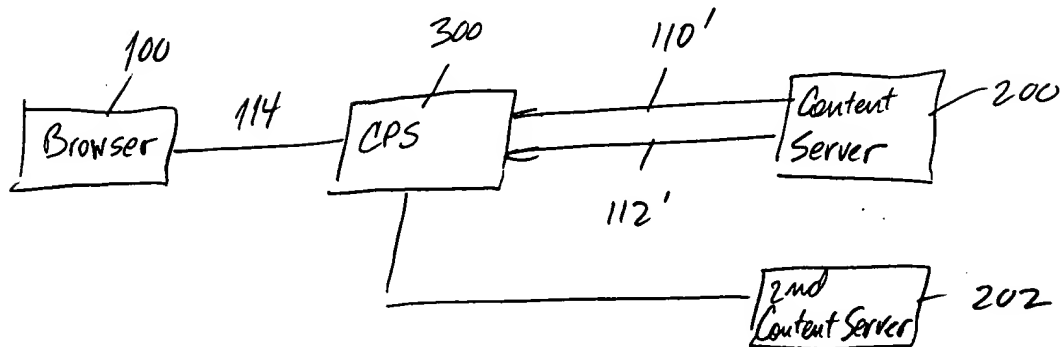


Fig. 2c

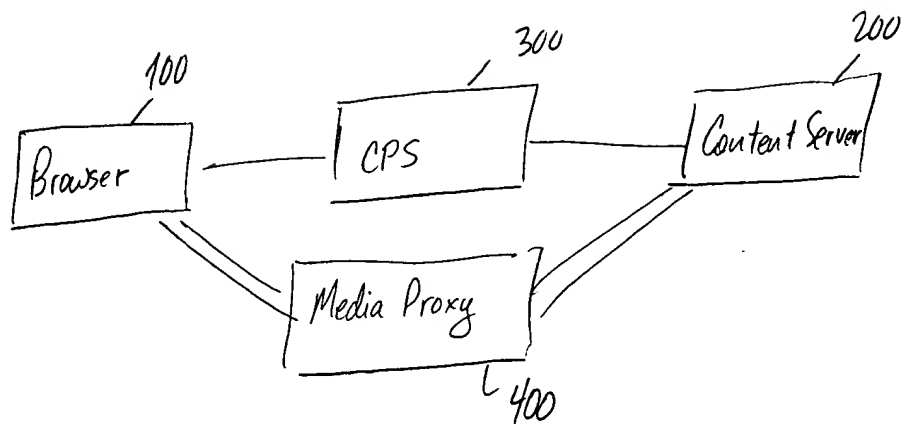


Fig. 2d

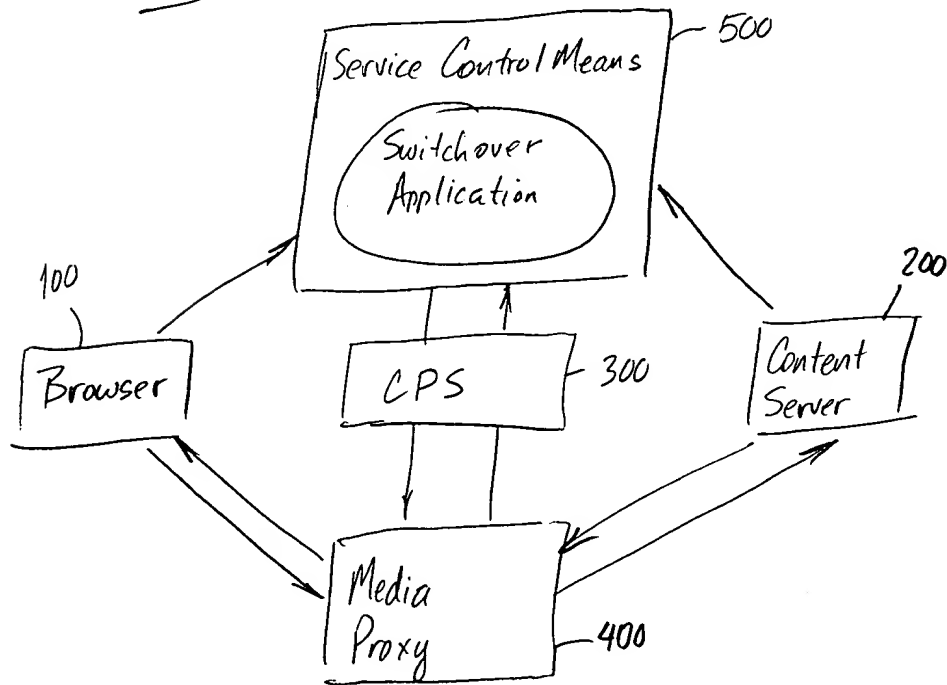


Fig. 3

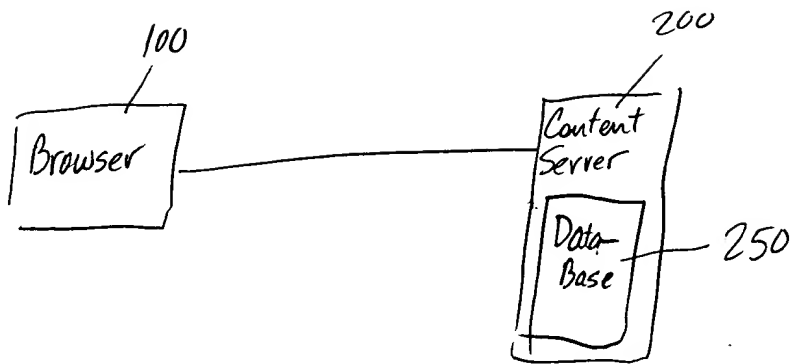


Fig. 4

BROWSER

CONTENT SERVER

←  $t_0$  switch over application

Schedule 1

$t_1 - k$  : availability clock  
 $t_1 - k + e$  : switchover application downloading  
 $t_1 - k + e + e$  : new session establishment  
 $t_1$  : visualization  
 $t_1 + e$  : switchover or disconnect

content reference for hyperlink 1

URL  
 session description  
 visualization  
 coordinate ranges

←  $t_1 + e$

Schedule 2

$t_2 - k$  : server selection  
 $t_2 - k + e$  : new session establishment  
 $t_2$  : visualization  
 $t_2 + e$  : switchover or disconnect

content reference for hyperlink 2

URL  
 session description  
 visualization  
 coordinate ranges

←  $t_2 + e$

661011-53466